PROPLAST
FAHRZEUGBELEUCHTUNG

PRO-IN CAB II




Technische Spezifikation	Ausführungen
- Stromaufnahme: max 15A - Spannungsbereich: 12-24V - IP Schutz: IP64 - Kabel 1,2m - 5 adrig	Rot - +VDC Schwarz - Masse Gelb - mit +VDC des Warnbalken verbinden Weiss - mit Blitzmoduswechsel des Warnbalken verbinden Grün - mit Zusatzfunktion des Warnbalken verbinden

PRO-SUPER-BAR


Für Warnbalken PRO-SUPEP-BAR

Orange Schalter (Warnbalken): Ein/Aus
Schwarz Taster (Biltzmodus): Biltzmodus wechsel


40 600 001
128 LED*1W
980×326×43mm




40 601 001
152 LED*1W
1200×326×43mm

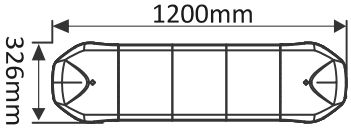

40 602 001
176 LED*1W
1420×326×43mm

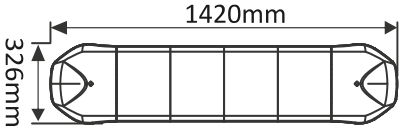

40 603 001
200 LED*1W
1640×326×43mm

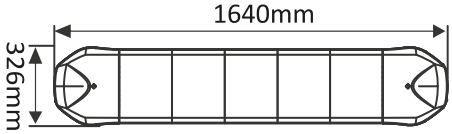

PRO-ROAD-BAR

Für Warnbalken PRO-ROAD-BAR mit Mittelteil opal

Orange Schalter (Warnbalken): Ein/Aus
Rot Schalter (AUX): Ein/Aus für Mittelteil opal
Schwarz Taster (Biltzmodus): Biltzmodus wechsel

40 631 001
126 LED*1W
980×326.6×43mm



40 631 501
126 LED*1W
980×326.6×43mm



40 632 001
192 LED*1W
1200×326.6×43mm



40 632 501
192 LED*1W
1200×326.6×43mm



40 633 501
240 LED*1W
1420×326.6×43mm



40 634 501
432 LED*1W
1860×326.6×43mm



PROPLAST
FAHRZEUGBELEUCHTUNG

PRO-IN CAB II



Specifications

- Current: Max 15A
- Voltage: 10-30V
- IP rated: IP64
- Cable: 1.2M with 5 cores

Wiring Diagram


Red: Positive for all, Connect with power
Black: Ground for all, Connect with power and negative of lightbar & auxiliary light
Yellow: Connect with positive of lightbar
White: Connect with pattern select of lightbar
Green: Connect with positive of auxiliary light

PRO-SUPER-BAR


For the bars PRO-SUPEP-BAR

Orange switch (Lightbar): on and off
Black switch (Pattern): change the mode


40 600 001
128 LED*1W
980×326×43mm




40 601 001
152 LED*1W
1200×326×43mm

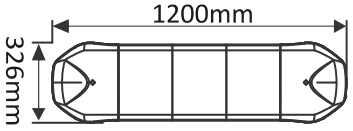

40 602 001
176 LED*1W
1420×326×43mm

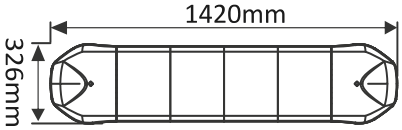

40 603 001
200 LED*1W
1640×326×43mm

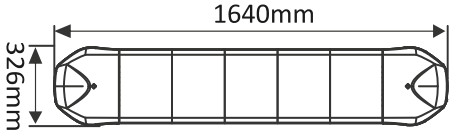

PRO-ROAD-BAR

For the bars PRO-ROAD-BAR with opal centre

Orange switch (Lightbar): on and off
Red switch (AUX): on and off for the opal center
Black switch (Paattern): change the mode

40 631 001
126 LED*1W
980×326.6×43mm



40 631 501
126 LED*1W
980×326.6×43mm



40 632 001
192 LED*1W
1200×326.6×43mm



40 632 501
192 LED*1W
1200×326.6×43mm



40 633 501
240 LED*1W
1420×326.6×43mm



40 634 501
432 LED*1W
1860×326.6×43mm

